Arcadaudio Einzelprodukte Preisliste

PREIS LISTE 2015

Name	Picture	Describe	Price(CHF)
LED MOVING HEAD SPOT			
hot A-61 10W LED Moving Head Spot		**POWER SUPPLIE** **Input power:AC100-240V 50/60 Hz** **Power consumption :22 W** **Output LUX :1500 LUX at 3 meters** **LED:1PCS 10W high power white LED** **DMX channel:4/12channels** **Movement:Pan/Tilt:X axis540degree, Y axis 190degree** **Control mode:DMX512/Master-Slave/Auto run/sound** **Display: LED display** **Color wheel: 7 color + open ,rainbow -flow effect** **Gobo wheel: 7 gobo +open, gobo - flow effect, gobo shake** **8 internal program , sound mode can control by DXM 512** **Beam angle:13 degree** **WEIGHT&SIZE** **N.W: 3kgs** **size: 54*36*31cm/2pcs** **Its compact size and light weight makes it ideal for mobile entertainers, small club and bars, roller rinks, bowling centers or any mobile production.**	**CREE LED 246**
NEW A-61B 30W LED Moving Head Spot		**POWER SUPPLIE** **Input power:AC100-240V 50/60 Hz** **Power consumption :50 W** **LED:1PCS 30W high power white LED** **DMX channel:4/12channels** **Movement:Pan/Tilt:X axis540degree, Y axis 190degree** **Control mode:DMX512/Master-Slave/Auto run/sound** **Display: LED display** **Color wheel: 7 color + open ,rainbow -flow effect** **Gobo wheel: 7 gobo +open, gobo - flow effect, gobo shake** **8 internal program , sound mode can control by DXM 512** **Beam angle:13 degree** **WEIGHT&SIZE** **N.W: 3kgs** **size: 54*36*31cm/2pcs** **Its compact size and light weight makes it ideal for mobile entertainers, small club and bars, roller rinks, bowling centers or any mobile production.**	**299**
A-29 LED 30W spot		**Voltage: AC-220V ~ 240V 50-60HZ** **Total Power: 60W** **Light source: 30W high-power high-brightness white LED** **Color: A color plate, 9 colors + white** **Pattern: a pattern plate, with a pattern of rotation, seven interchangeable rotating gobos + white, gobo wheel spin in both directions** **X-axis: the maximum angle of 540 ° horizontal rotation** **Y axis: the maximum angle of 255 ° vertical rotation** **Strobe :1-20 times / second, free to choose the speed from slow to fast strobe** **Dimmer: Electronic dimming 0% - 100%, the light angle 12 ℃** **Focus: linear focus (customer optional)** **Prism: prism (customer optional** **Channel: DMX channels 10/11/12** **Control mode: DMX controlled, master-slave control of voice and music.** **Packing: 410×330×280mm** **weight;7.5KG**	**499**

A-27 LED 30W spot		10channel DMX-512 Pan: 540 degree, Tilt: 255 degree 6 gobo + Open Gobo rotation 7 color + Open Variable electronic strobe Variable electronic dimmer (0%-100%) Master/slave Sound active Built-in movement macros via master/slave or DMX User-selectable pan/tilt direction LED display menu with invert Reset to factory settings option Display auto on/off Compact & lightweight SPECIFICATIONS Beam angle: 12 degree Light Source: 1x (30 watt) LED 50,000hrs Power:220- 230V 50/60Hz 80W Gross weight: 8.7 kgs Packing size: 34.5x34.5x43.5cm	**Without prism 399** **With prism 445**
A-27B LED 60W spot		10channel DMX-512 Pan: 540 degree, Tilt: 255 degree 6 gobo + Open Gobo rotation 7 color + Open Variable electronic strobe Variable electronic dimmer (0%-100%) Has the prism function Master/slave Sound active Built-in movement macros via master/slave or DMX User-selectable pan/tilt direction LED display menu with invert Reset to factory settings option Display auto on/off Compact & lightweight SPECIFICATIONS Beam angle: 12 degree Light Source: 1x (60 watt) LED 50,000hrs Power:220- 230V 50/60Hz 80W Gross weight: 8.7 kgs Packing size: 34.5x34.5x43.5cm	**490**
hot A-08 LED 60W spot	 	Name: 60W LED GOBE Moving Head Light Spot Voltage: 110-240V, 50/60Hz Power: 150W Control: DMX/ Auto/ Sound/ Master/ Slave Bulb: 1 x 60W (white) LED Channels: 14 CH Focus, Rotating prism function Pan: 540, Tilt: 270 2 Gobo wheels Rotated Gobos: 2 glass + 5 metal + white, gobo Shake Static Gobos: 9 metal gobos. Colors: 8 color + rainbow effect Dimension: 295x290x485mm Weight: 13.6 KG Control: DMX/ Auto/ Sound/ Master/ Slave Bulb: 1 x 60W (white) LED Channels: 14 CH	**690**
A-24 LED 90W spot		Voltage: AC110/120V or 200/240V Frequency :50-60HZ Total Power: 180W Light source: 90W high-power high-brightness white LED lamp beads imported from Taiwan, Color: A color plate, 7 colors + white Pattern: two gobo wheel, a gobo wheel with Gobo rotation, 6 interchangeable rotating gobos + white, gobo wheel spin in both directions X-axis: the maximum angle of 540 ° horizontal rotation Y axis: the maximum angle of 255 ° vertical rotation Strobe :1-20 times / second, free to choose the speed from slow to fast strobe Dimmer: Electronic dimming 0% - 100% Channel: 11/14 DMX channels Control mode: DMX controlled, master-slave control of voice and music. Focus: Manual Focus Product Dimensions: 295 × 290 × 485mm Packing Size: 520 × 380 × 350mm Net weight: 12.8.kg GW: 16.kg	**840**

NEW **A-42F** LED 150W spot		Voltage:AC90-260V 50-60Hz; Consumption:240W high power 150W white LED (China's LED) 50,000 hours lifepan and low power consumption 16bit smooth and precise resolution for PAN/TILT movement 540°/630° pan and 270° tilt movement Scan position memory,auto reposition after unexpected movement 1 color wheel with 7 dichroic colors plus open Variable direction rainbow effect with speed adjustable 1rotatable gobo wheel with 7 rotatable interchangeable gobos plus open(3metal and 4glass gobos)with speed adjustable,stream effect,dithering effect and rotatable clockwise or anticlockwise 1 static gobo wheel with 9 interchangeable gobos plus open Gobo size 27.9mm(external dimensions)/23mm(inner dimensions) 1 rotatable 3-facet prism with speed adjustable and variable direction 2meter to infinite electronic focus 15° projection beam angle Improved optics and flat beam field Electronic linear IRIS 0-100% linear dimmer with 1-18times/sec high speed ecetronice strobe LED shutter with variable speed 17 DMX channels,Other DMX modes available,3pin DMX connectors DMX512,master-slave and sound activated controllable or auto operation(8built-in programs) Blue background LCD display 45℃ max ambient temperature; IP20 protection rating,55dB at 3′ dB rating; Dimensions:203x300x437mm Packing dimensions:490x370x375mm N.W:12KGS G.W:15KGS	1190
NEW **A-62** LED 180W spot		Voltage:AC90-260V 50-60Hz; Consumption:240W Luminus high power 180W white LED unit 50,000 hours lifepan and low power consumption 16bit smooth and precise resolution for PAN/TILT movement 540°/630° pan and 270° tilt movement Scan position memory,auto reposition after unexpected movement 1 color wheel with 7 dichroic colors plus open Variable direction rainbow effect with speed adjustable 1rotatable gobo wheel with 7 rotatable interchangeable gobos plus open(3metal and 4glass gobos)with speed adjustable,stream effect,dithering effect and rotatable clockwise or anticlockwise 1 static gobo wheel with 9 interchangeable gobos plus open Gobo size 27.9mm(external dimensions)/23mm(inner dimensions) 1 rotatable 3-facet prism with speed adjustable and variable direction 2meter to infinite electronic focus 15° projection beam angle Improved optics and flat beam field Electronic linear IRIS 0-100% linear dimmer with 1-18times/sec high speed ecetronice strobe LED shutter with variable speed 17 DMX channels,Other DMX modes available,3pin DMX connectors DMX512,master-slave and sound activated controllable or auto operation(8built-in programs) Blue background LCD display 45℃ max ambient temperature; IP20 protection rating,55dB at 3′ dB rating; Dimensions:301x321x547mm Packing dimensions:495x415x660mm N.W:12KGS G.W:16KGS	1290
hot **A-42** LED 120W spot		Voltage:AC90-260V 50-60Hz; Consumption:240W Luminus high power 120W white LED unit 50,000 hours lifepan and low power consumption 16bit smooth and precise resolution for PAN/TILT movement 540°/630° pan and 270° tilt movement Scan position memory,auto reposition after unexpected movement 1 color wheel with 7 dichroic colors plus open Variable direction rainbow effect with speed adjustable 1rotatable gobo wheel with 7 rotatable interchangeable gobos plus open(3metal and 4glass gobos)with speed adjustable,stream effect,dithering effect and rotatable clockwise or anticlockwise 1 static gobo wheel with 9 interchangeable gobos plus open Gobo size 27.9mm(external dimensions)/23mm(inner dimensions) 1 rotatable 3-facet prism with speed adjustable and variable direction 2meter to infinite electronic focus 15° projection beam angle Improved optics and flat beam field Electronic linear IRIS 0-100% linear dimmer with 1-18times/sec high speed ecetronice strobe LED shutter with variable speed 16 DMX channels,Other DMX modes available,3pin DMX connectors DMX512,master-slave and sound activated controllable or auto operation(8built-in programs) Blue background LCD display 45℃ max ambient temperature; IP20 protection rating,55dB at 3′ dB rating; Dimensions:203x300x437mm Packing dimensions:490x370x375mm N.W:12KGS G.W:15KGS	990

A-42B LED 90W spot		**Voltage:AC90-260V 50-60Hz; Consumption:240W** **high power 90W white LED unit** **50,000 hours lifepan and low power consumption** **16bit smooth and precise resolution for PAN/TILT movement** **540°/630° pan and 270° tilt movement** **Scan position memory,auto reposition after unexpected movement** **1 color wheel with 7 dichroic colors plus open** **Variable direction rainbow effect with speed adjustable** **1rotatable gobo wheel with 7 rotatable interchangeable gobos plus open(3metal and 4glass gobos)with speed adjustable,stream effect,dithering effect and rotatable clockwise or anticlockwise** **1 static gobo wheel with 9 interchangeable gobos plus open** **Gobo size 27.9mm(external dimensions)/23mm(inner dimensions)** **1 rotatable 3-facet prism with speed adjustable and variable direction** **2meter to infinite electronic focus** **15° projection beam angle** **Improved optics and flat beam field** **Electronic linear IRIS** **0-100% linear dimmer with 1-18times/sec high speed ecetronice strobe** **LED shutter with variable speed** **16 DMX channels,Other DMX modes available,3pin DMX connectors** **DMX512,master-slave and sound activated controllable or auto operation(8built-in programs)** **Blue background LCD display** **45℃ max ambient temperature;** **IP20 protection rating,55dB at 3′ dB rating;** **Dimensions:203x300x437mm Packing dimensions:490x370x375mm** **N.W:12KGS G.W:15KGS**	**890**
A-54 330w 15R spot		**Input power:AC110-240V 50/60 Hz** **Lamp: MSD R17 /R15 , 8000k(Optional Osram Siruis HRI 330W)** **Power Consumption: 350W** **Lens: Anti-reflective coated lens** **Output Lux: 10,500lux at 20 meters** **Colors: Basic color wheel with 6 dichroic mirrors, plus white, two direction rainbow effec** **8 rotating gobos plus open, all gobos can be easily replaceable and gobo indexing** **Static gobo wheel with 14 indexing gobos plus open, gobo shaking in different speed** **Prism and prism rotating , with 16 prism macros** **Linear dimmer in precise speed from 0% ~ 100%** **Stepless frost, 0%-100% linear change frost** **Iris from 5%~100% with pulse iris effect.** **Zoom: 9°~27° linear zoom** **Strobe/shutter: High speed shutter, 0-13 Hz or random strobe** **DMX Channels: 3 DMX Modes-18hannels DMX** **Control: 3-pin&5-pin DMX** **Control board with LCD graphic display** **Remote controller lamp's switch function, display light and lamp's using time** **Structure: heat-proof plastic+module pressing alloy materials** **Pan and tilt movement: 8 and 16 bit resolution** **For smooth and precise motion** **Movement: Pan: 360°/540°optional, Tilt: 270°** **Speed of pan/tilt movement adjustable** **Scan position memory, auto reposition after unexpected movement** **Weight: 23kgs** **Dimensions: 409*419*541mm**	**Not CMY** **1990** **With CMY** **2190**
A-63 280w 10R spot		**Voltage: 200 ~ 240V / 50-60Hz (100 ~ 120V / 50-60Hz selective)** **Power: 280W luminous flux of 7950 lm, 8000K color temperature up** **Color Wheel: a color wheel, each color plate by 17 colors + white composition** **Gobo wheel: 17 gobos, rotating gobos 9** **Effect wheel: a rotatable 3 prisms ZOOM 4-30 degrees** **IP rating: IP20 reliable high-efficiency switching power supply** **Lamp Size: 523x337x570mm** **Weight: 18.5kg**	**1290**

NEW **A-63B** 280w 10R spot and beam		Lamp: 280W (Color temperature:8000K) Channel mode: 16/24 DMX512 Channel Pan scan：540°(16bit)Electric correction Tilt scan：270°(16bit)Electric correction Amazing dot matix,four tact switch,180°turning show Color wheel:one color wheel,13kinds of color chips in one color wheel Static Gobo:14gobos+1 Rotation Gobo:9gobos Effect Wheel: one Rotation eight prism,one Rotation six prism effect move, frost 0-100% mechanical dimming,mechanical dimming and free dimming available. strobe macrocontrol available. Lens optical system achanical focus .beam angle3.8°-20° Over heat protection Power Input:100-240V，50/60Hz Power Dissipation：420W IP level:IP20 Magnetic ballast and AC/D cpower supply Packing Size:523x337x570mm Net weight：20KG beam effect and 200W beam is almost as good. spot effect and 1200W is almost as good.	OSRAM Lamp 1290/pcs China Lamp 1090/pcs
NEW **A-69** led 75w spot		POWER SUPPLIE Input power:AC100-240V50/60Hz Power consumption:100W LED:75W high power LED DMX channel:4/16channels Control mode:DMX512/Master-Slave/Autorun Display:LCD display WEIGHT&SIZE N.W:7KG G.W:8KG Packingsize:30*18*43cm 	480
NEW **A-69B** led 90w spot		POWER SUPPLIE Input power:AC100-240V50/60Hz Power consumption:130W LED:90W high power LED DMX channel:4/16channels Control mode:DMX512/Master-Slave/Autorun Display:LCD display WEIGHT&SIZE N.W:7KG G.W:8KG Packingsize:30*18*43cm 	490

LED MOVING HEAD WASH

hot A-15 Wash 18Pcs*3 W LED		12 channel DMX-512 LED moving yoke color wash; RGB color mixing; Light Source : 3W*6R/ 3W*6G/3W*6B Variable electronic strobe; Variable electronic dimmer (0—100%); Vector speed channel for pan/tilt, RGB color mixing and color macros; Built-in movement macros via DMX; Built-in automated programs via master/slave(fast and slow); Built-in sound activated programs via master/slave; User-selectable basic or advanced operating modes; User-selectable pan/tilt ranges; Pan: 540°,360°,180° Tilt: 180°,180°,90°;	209
hot A-16 Wash 7Pcs*8W LED		Power supply: AC110V-240V 50/60Hz Power consumption: 70W Lamp: LED 8W×7Pcs 4in1., 50,000hrs User modes: Standalone, Music, Master/Slave, DMX-512 High Power, 8W×7Pcs 4in1 LED Wash Moving Yoke DMX-512: 8 or 13 channels Pan 540°/Tilt: 270° RGB color mixing Variable electronic strobe Variable electronic dimmer (0~100%) Vector-in movement macros via master/slave or DMX User-selectable basic or advanced operating modes User-selectable pan/tilt ranges Pan: 540°, 360°, 180° Tilt: 270°, 180°, 90° Dimensions(LxWxH): 275mmx220mmx260mm Weight: 3.7kg	219

A-22 Wash 108Pcs* 3W LED		VOLTAGE: AC110-240V, 50/60Hz LED: 3W*108pcs (R:30;G:30;B:30;W:18) POWER CONSUMPTION: 360W BEAM ANGLE: 15°-45°(Optional) RATED LIFE: 60,000-100,000hours COLOR MIXING: RGBW FOCUS: Linearly adjustable DIMMER: 0-100% linearly adjustable STROBE: 0-20 flash per second, speed adjustable PAN AND TILT: Smooth, automatic Pan&Tilt positioncorrection, speed adjustable RANGE: Pan-540°, Tilt-270°(16-bit) VECTOR MODE: Color+XY Vector CONTROL PROTOCOL: DMX 512, 3 pin interface CHANNELS: 13 DISPLAY: LED display PROTECT GRADE: IP20,overheating & overvoltage protection NET WEIGHT: 9KG GROSS WEIGHT: 11KG FIXTURE DIMENSION: L340*W240*H390(mm) PACKING DIMENSION: L410*W385*H445(mm)	480
A-30 LED Moving Head 36*10W		Parameters: Power AC100/240V 50/60Hz Power 360W Basic configuration: 36pcs 10w four-color red, green and blue LED lamp beads Red, green, blue, white polar blending, gradient Strobe speed from fast to slow to the speed strobe, 1-25 per second 0-100% electronic dimming Level of 540 °, fine-tuning 16bit Vertical 240 °, fine-tuning 16bit Horizontal / vertical speed adjustment, 14/16 DMX signal channel, Lamp reset Control mode: sound, automatic operation, DMX control Appearance of the structure: LCD Display	270
A-30Z LED Moving Head 36*10W ZOOM		Parameters: Power AC100/240V 50/60Hz Power 360W Basic configuration: 36pcs 10w four-color red, green and blue LED lamp beads Red, green, blue, white polar blending, gradient Strobe speed from fast to slow to the speed strobe, 1-25 per second 0-100% electronic dimming Zoom function, zoom angle of 10 °-- 60 ° Level of 540 °, fine-tuning 16bit Vertical 240 °, fine-tuning 16bit Horizontal / vertical speed adjustment, 14/16 DMX signal channel, Lamp reset Control mode: sound, automatic operation, DMX control Appearance of the structure: LCD Display	280
hot A-43 LED 36*3W BEAM		Voltage: 100V~240V, 50/60Hz Fuse: T 4A Power consumption: 200W Light source: 3W LED x 36 (R8, G10, B10,W8) (CREE LED) DMX Channels: 15 Pan/Tilt: 540°/240°, speed adjustable Smooth electronic dimming: 0-100% Electronic strobe with pulse and random effects High efficiency, low power consumption Super compact, low weight Dimension: 304X267X167 mm Weight: 5.7 kg	320
A-50 LED 37*3W BEAM		Voltage:AC100~240V 50/60Hz Rated Power:160W LED:37PC(13R+12G+12B)(CREE LED) Cooling:Forced air convection Color mixing / Custom programs / Strobe / White balance / RGB calibration / Dim 4 / Fan speed Control mode:Master-Slave/Auto/Custom/ Sound LCD display DMX512 Chs:14CHS Pan/Tilt Pan 540 Tilt 270 Pan/Tilt speed User-selectable Pan/Tilt ranges Size:400x380x280mm Weight:6.8kg	410

hot A-51 LED 12*10W BEAM		Power 150W Input voltage 100-240V AC, 50/60Hz LED 12X 10W quad color LEDs (CREE LED) LUX 4600 at 5 meters DMX control 9/14/16/28 channel Beam angle of 10 ° Pan/Tilt: 630°/200 Dimensions 304 x 267 x 168mm Weight 5.8kgs	425
A-55 LED 7*12W BEAM		Power 150W Input voltage 100-240V AC, 50/60Hz LED 7X 12W quad color LEDs(CREE LED) LUX 4600 at 5 meters DMX control 9/12/14/16/28 channel Beam angle of 8 ° Pan/Tilt: 630°/200 Dimensions 304 x 267 x 168mm Weight 5.8kgs	415
hot A-56 LED 19*12W WASH ZOOM		Extremely small, fast and powerful LED moving beam. DMX Channels: 16 channels mode Operation modes: DMX512, Master/Slave Great built-in lighting shows under Master/Slave mode Blue LCD display for easy navigation Perfect for stage, theatre, TV studio, rental and discotheques Voltage: AC 100V~240V, 50/60Hz Power consumption: 260W LED: 19 X 12W RGBW LED Dimension: 324.8X188X395.4mm Weight: 9.2Kgs Beam Angel: 6°~50°	3pcs zoom motor. 890
hot A-56B LED 19*12W WASH ZOOM		Extremely small, fast and powerful LED moving beam. DMX Channels: 16 channels mode Operation modes: DMX512, Master/Slave Great built-in lighting shows under Master/Slave mode Blue LCD display for easy navigation Perfect for stage, theatre, TV studio, rental and discotheques Voltage: AC 100V~240V, 50/60Hz Power consumption: 260W LED: 19 X 12W RGBW LED Dimension: 324.8X188X395.4mm Weight: 9.2Kgs Beam Angel: 10°~50°	1pcs zoom motor. 790
A-57 LED 12*10W Effect Light		Input voltage 100-240V AC, 50/60Hz LED 12X 10W quad color LEDs (CREE LED) LUX 4600 at 5 meters DMX control 18 channel Weight 5.8kgs	420
A-58 LED 8*10W Spider Light white		Inputpower: AC100-240V50/60Hz LED: 8PCS10W high power white LED DMX channel: 8/21channels Movement:Pan/ 540°,Tilt:Y1 120°,Y2 120° Control mode:DMX512/Master-Slave/ Autorun/sound Display: LCD display Beamangle:3° Pan/tilts peed:3 selectable for High,medium and low speed N.W:9kgs G.W:11kgs size:32*41*28CM Packingsize:50*38*37CM	460

A-58B LED 8*10W Spider Light RGBW		**Inputpower: AC100-240V50/60Hz** **LED: 8PCS10W high power RGBW LED** **DMX channel: 13/46channels** **Movement:Pan/ 540°,Tilt:Y1 120°,Y2 120°** **Control mode:DMX512/Master-Slave/ Autorun/sound** **Display: LCD display** **Beamangle:3°** **Pan/tilts peed:3 selectable for High,medium and low speed** **N.W:9kgs** **G.W:11kgs** **size:32*41*28CM** **Packingsize:50*38*37CM**	**480**
A-59 LED 8*10W Spider Light white		**Inputpower:AC100-240V50/60Hz** **LED:8PCS 10W high power white LED** **DMXchannel:8/16channels** **Movement: Tilt1:120°,Tilt2:120°** **Controlmode: DMX512/Master-Slave/Autorun** **Display:LED display** **Beamangle:3°** **N.W:5kgs** **G.W:6kgs** **Packing size:50*32*22CM**	**290**
A-59B LED 8*10W Spider Light RGBW		**Inputpower:AC100-240V50/60Hz** **LED:8PCS 10W high power RGBW LED** **DMXchannel:16/41channels** **Movement: Tilt1:120°,Tilt2:120°** **Controlmode: DMX512/Master-Slave/Autorun** **Display:LED display** **Beamangle:3°** **N.W:5kgs** **G.W:6kgs** **Packing size:50*32*22CM**	**320**
hot A-60 Two-Sided LED WASH Moving Head light		**POWER SUPPLIE** **Input power:AC100-240V 50/60 Hz** **Power consumption :91 W** **LED:8 PCS 8W high power RGBW LED** **DMX channel:16/22channels** **Movement:Pan/Tilt:Pan 540degree, Til Endless rotation** **Control mode:DMX512/Master-Slave/Auto run/sound** **Display: LED display** **8 internal program , sound mode can control by DXM 512** **Beam angle:25 degree** **WEIGHT&SIZE** **N.W: 3kgs** **size: 54*36*31cm/2pcs** **Its compact size and light weight makes it ideal for mobile entertainers, small club and bars, roller rinks, bowling centers or any mobile production.**	**299**

hot A-60B Two-Sided LED BEAM Moving Head light	 	**POWER SUPPLIE** **Input power:AC100-240V 50/60 Hz** **Power consumption :40 W** **LED:2PCS 10W high power RGBW CREE LED** **DMX channel:16/22channels** **Movement:Pan/Tilt:Pan 540degree, Til Endless rotation** **Control mode:DMX512/Master-Slave/Auto run/sound** **Display: LED display** **8 internal program , sound mode can control by DXM 512** **Beam angle:25 degree** **WEIGHT&SIZE** **N.W: 3kgs** **size: 54*36*31cm/2pcs** **Its compact size and light weight makes it ideal for mobile entertainers, small club and bars, roller rinks, bowling centers or any mobile production.**	**299**
hot A-60C Two-Sided LED BEAM AND WASH Moving Head light	 	**POWER SUPPLIE** **Input power:AC100-240V 50/60 Hz** **Power consumption :70 W** **LED:1PCS 10W RGBW CREE LED and 4pcs 10W RGBW TianXin LED** **DMX channel:16/22channels** **Movement:Pan/Tilt:Pan 540degree, Til Endless rotation** **Control mode:DMX512/Master-Slave/Auto run/sound** **Display: LED display** **8 internal program , sound mode can control by DXM 512** **Beam angle:25 degree** **WEIGHT&SIZE** **N.W: 3kgs** **size: 54*36*31cm/2pcs** **Its compact size and light weight makes it ideal for mobile entertainers, small club and bars, roller rinks, bowling centers or any mobile production.**	**299**
NEW A-60D LED 40w BEAM Moving Head light	 	**POWER SUPPLIE** **Input power:AC100-240V 50/60 Hz** **Power consumption :55 W** **LED:1PCs 40w high power RGBW LED** **DMX channel:7/16channels** **Movement:Pan/Tilt:540 degree or Endless rotation, Til:180°** **Control mode:DMX512/Master-Slave/Auto run/sound** **Display: LED display** **8 internal program , sound mode can control by DXM 512** **Beam angle:25 degree** **WEIGHT&SIZE** **N.W: 3kgs** **size: 54*36*31cm/2pcs** **Its compact size and light weight makes it ideal for mobile entertainers, small club and bars, roller rinks, bowling centers or any mobile production.**	**299**
NEW **A-64** 19*12w bees light		**Inputpower:AC100-240V50/60Hz** **LED:19PCS 12W high power RGBW LED** **DMXchannel:14/53channels** **Controlmode:DMX512/Master-Slave/Autorun** **Display:BluegroundLCDdisplay** **Beamangle:6-50degree** **WEIGHT&SIZE** **G.W:9.2KG** **Packingsize:324.8*188*395.4mm**	**799**

NEW **A-70** 19*12w big bees light			1290
NEW **A-65** 9*12w Matrix LED Moving Head		**POWER SUPPLIE** **Input power:AC100-240V 50/60 Hz** **Power consumption :115 W** **LED: 9PCS 12W high power RGBW LED** **DMX channel:13/48 channels** **Control mode:DMX512/Master-Slave/Auto run** **Display:LCD display** **WEIGHT&SIZE** **N.W: 7KG** **G.W: 8 KG** **Packing size: 27*15*40cm**	449
NEW hot **A-66** **8*12w Two-Sided LED mini Moving Head**	 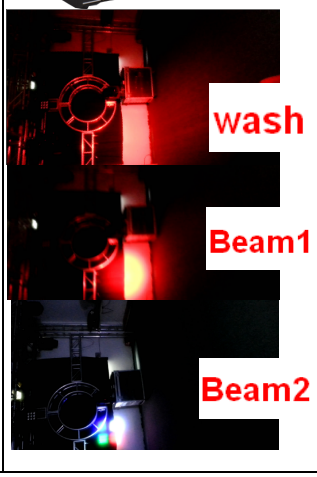	**POWER SUPPLIE** **Input power:AC100-240V 50/60 Hz** **Power consumption :110 W** **LED:8 PCS 12W high power RGBW LED** **DMX channel:16/22 channels** **Movement:Pan/Tilt:X axis540degree, Y axis Endless rotation** **Control mode:DMX512/Master-Slave/Auto run/sound** **Display: LED display** **8 internal program , sound mode can control by DXM 512** **Beam angle: 25 degree** **3 effect can be selected.** **Can produce six different models.** **WASH+WASH** **BEAM1+BEAM1** **BEAM2+BEAM2** **WASH+BEAM1** **BEAM1+BEAM2** **WASH+BEAM2** **BEAM1 (with color mixing)** **BEAM2 (without color mixing)** **Wash**	 449

NEW hot **A-67 4*12w mini LED Moving Head**	 	POWER SUPPLIE Input power:AC100-240V 50/60 Hz Power consumption :55 W LED:4 PCS 12W high power RGBW LED DMX channel:12/19channels Movement:Pan/Tilt:X axis 360 degree or Endless rotation, Y axis 180 degree. Control mode:DMX512/Master-Slave/Auto run/sound Display: LED display 8 internal program , sound mode can control by DXM 512 Beam angle: 3 degree **2 effect can be selected.** **BEAM1 (with color mixing) wash**	299
NEW **A-68 4*25w beam LED Moving Head**	 	 POWER SUPPLIE Input power:AC100-240V50/60Hz Power consumption:130W LED:4*25W high power LED DMX channel: 9/15channels Control mode:DMX512/Master-Slave/Autorun Display:LCD display WEIGHT&SIZE N.W:7KG G.W:8KG Packing size:27*15*40cm 	480
Beam lights			
B-07 120W LED beam		Voltage:AC90-260V 50-60Hz; Consumption:240W Luminus high power 120W white LED unit(CBM-360-W) 50,000 hours lifepan and low power consumption 16bit smooth and precise resolution for PAN/TILT movement 540°pan and 270° tilt movement Scan position memory,auto reposition after unexpected movement 1 color wheel with 5colors plus open Variable direction rainbow effect with speed adjustable 1 static gobo wheel with 7 fixed gobos plus open Gobo size 27.9mm(external dimensions)/23mm(inner dimensions) 1 rotatable 5-facet prism with speed adjustable and variable direction 0-100% linear dimmer with 1-18times/sec high speed ecetronice strobe LED shutter with variable speed 12 DMX channels,Other DMX modes available,3pin DMX connectors DMX512,master-slave and sound activated controllable or auto operation(8built-in programs) Blue background LCD display 45℃ max ambient temperature; IP20 protection rating,55dB at 3′ dB rating; Dimensions:203x300x437mm Packing dimensions:253x350x487mm N.W:10.5KGS G.W:13.5KGS	990

B-09 90W LED beam		Voltage:AC90-260V 50-60Hz; Consumption:240W high power 90W white LED unit 50,000 hours lifepan and low power consumption 16bit smooth and precise resolution for PAN/TILT movement 540°pan and 270° tilt movement Scan position memory,auto reposition after unexpected movement 1 color wheel with 5colors plus open Variable direction rainbow effect with speed adjustable 1 static gobo wheel with 7 fixed gobos plus open Gobo size 27.9mm(external dimensions)/23mm(inner dimensions) 1 rotatable 5-facet prism with speed adjustable and variable direction 0-100% linear dimmer with 1-18times/sec high speed ecetronice strobe LED shutter with variable speed 12 DMX channels,Other DMX modes available,3pin DMX connectors DMX512,master-slave and sound activated controllable or auto operation(8built-in programs) Blue background LCD display 45℃ max ambient temperature; IP20 protection rating,55dB at 3′ dB rating; Dimensions:203x300x437mm Packing dimensions:253x350x487mm N.W:10.5KGS G.W:13.5KGS	890
B-08 5R 200W Beam lights	 	Products Instruction: MODEL : Beam 200 Voltage : 200W~240V/50-60Hz (100~120V/ 50-60Hz selective) Ballast : Magnetic-ballast Lamp :PHLIPS 189W Color temperature : 8000K Average Lifespan: 2000H Color : 14 color + blank color wheel Gobo : 17 fixed gobo + blank gobo Prism : rotation 8-face prism, Bilateral rotation . Lens: high precision glass optical lens Wash effect : adjustable Wash effects angle Focus: linear adjustment Dimmer : 0-100% linear adjustment Pan/Tilt : X axis 540° Y axis 250°automatically accurate positioning Beam angle : parallel beam angel 0 – 3.8° Strobe : Double lens strobe (0.5-9 times/ second) Control mode : Standard DMX512, Automatic and Master/ slave mode Channel : 16 CHS Controller can open the lamp and reset, including delaying function Weight : 19.5KG Packing size:49*42*57cm	790
B-08B 7R 230W Beam lights	 	Products Instruction: MODEL : Beam 230 Voltage : 200W~240V/50-60Hz (100~120V/ 50-60Hz selective) Ballast : Magnetic-ballast Lamp :Osram 230W Color temperature : 8000K Average Lifespan: 2000H Color : 14 color + blank color wheel Gobo : 17 fixed gobo + blank gobo Prism : rotation 8-face prism, Bilateral rotation . Lens: high precision glass optical lens Wash effect : adjustable Wash effects angle Focus: linear adjustment Dimmer : 0-100% linear adjustment Pan/Tilt : X axis 540° Y axis 250°automatically accurate positioning Beam angle : 3.8° Strobe : Double lens strobe (0.5-9 times/ second) Control mode : Standard DMX512, Automatic and Master/ slave mode Channel : 16 CHS Controller can open the lamp and reset, including delaying function Weight : 19.5KG Packing size:49*42*57cm	890
B-08C 5R 200W Beam lights	 	Products Instruction: MODEL : Beam 200 Voltage : 200W~240V/50-60Hz (100~120V/ 50-60Hz selective) Ballast : Magnetic-ballast Lamp :PHLIPS 189W Color temperature : 8000K Average Lifespan: 2000H Color : 14 color + blank color wheel Gobo : 17 fixed gobo + blank gobo Prism : rotation 8-face prism, Bilateral rotation . Lens: high precision glass optical lens Wash effect : adjustable Wash effects angle Focus: linear adjustment Dimmer : 0-100% linear adjustment Pan/Tilt : X axis 540° Y axis 250°automatically accurate positioning Beam angle :3.8° Strobe : Double lens strobe (0.5-9 times/ second) Control mode : Standard DMX512, Automatic and Master/ slave mode Channel : 16 CHS Controller can open the lamp and reset, including delaying function Weight : 19.5KG Packing size:49*42*57cm	790

B-08C 7R 230W Beam lights	 	**Products Instruction:** **MODEL : Beam 230** **Voltage : 200W~240V/50-60Hz (100~120V/ 50-60Hz selective)** **Ballast : Magnetic-ballast** **Lamp :Osram 230W** **Color temperature : 8000K** **Average Lifespan: 2000H** **Color : 14 color + blank color wheel** **Gobo : 17 fixed gobo + blank gobo** **Prism : rotation 8-face prism, Bilateral rotation .** **Lens: high precision glass optical lens** **Wash effect : adjustable Wash effects angle** **Focus: linear adjustment** **Dimmer : 0-100% linear adjustment** **Pan/Tilt : X axis 540° Y axis 250°automatically accurate positioning** **Beam angle:3.8°** **Strobe : Double lens strobe (0.5-9 times/ second)** **Control mode : Standard DMX512, Automatic and Master/ slave mode** **Channel : 16 CHS** **Controller can open the lamp and reset, including delaying function** **Weight : 19.5KG** **Packing size:523*337*511mm**	**850**
hot B-08DH 5R 200W Beam lights (Good material)	 	**Products Instruction:** **(LCD touch screen)** **MODEL : Beam 200/beam 230** **Voltage : 200W~240V/50-60Hz (100~120V/ 50-60Hz selective)** **Ballast : Magnetic-ballast** **Lamp :PHLIPS 189W,Osram 230W** **Color temperature : 8000K** **Average Lifespan: 2000H** **Color : 14 color + blank color wheel** **Gobo : 17 fixed gobo + blank gobo** **Prism : rotation 8-face prism, Bilateral rotation .** **Lens: high precision glass optical lens** **Wash effect : adjustable Wash effects angle** **Focus: linear adjustment** **Dimmer : 0-100% linear adjustment** **Pan/Tilt : X axis 540° Y axis 250°automatically accurate positioning** **Beam angle : 3.8°** **Strobe : Double lens strobe (0.5-9 times/ second)** **Control mode : Standard DMX512, Automatic and Master/ slave mode** **Channel : 16 CHS** **Controller can open the lamp and reset, including delaying function** **Weight : 19.5KG** **Packing size:49*42*57cm**	**200W/800** **230W/840**
hot B-08D 5R 200W Beam lights (General Materials)		**Products Instruction:** **MODEL : Beam 200/beam 230** **LCD touch screen** **Voltage : 200W~240V/50-60Hz (100~120V/ 50-60Hz selective)** **Lamp :China bulbs 200w/230w** **Color temperature : 8000K** **Channel : 16/20 CHS** **Controller can open the lamp and reset, including delaying function** **Weight : 19.5KG** **Packing size:49*42*57cm**	**200W/700** **230W/799**
hot B-10 8PCS WHITE 10W Beam lights		**VOLTAGE:90-240VAC,50/60HZ** **RATED POWER:100W** **LED:8PCS 10W high power white LED** **Extremel y Long Li fte:5000Hr and low power consumpti on** **DMX channel :5/14channel s** **Strobe: effect wi th 1~25fl ashes per second and pul se effect** **Ti l t:230degree** **Control mode:DMX512/Master-Sl ave/Auto run** **Preset program:8 bui l t in programs can be cal l ed up vi a DMX control l er** **Wei ght:8kg** **Packi ng si ze:117*17*22cm**	**299**
B-10B 8*10W RGBW Beam lights		**VOLTAGE:90-240VAC,50/60HZ** **RATED POWER:100W** **LED:8PCS 10W hi gh power RGBW LED** **Extremel y Long Li fte:5000Hr and low power consumpti on** **DMX channel :9/38channel s** **Strobe: effect wi th 1~25fl ashes per second and pul se effect** **Ti l t:265degree** **Control mode:DMX512/Master-Sl ave/Auto run** **Preset program:22 bui l t in programs can be cal l ed up vi a DMX control l er** **Wei ght:8kg** **Packi ng si ze:117*17*22cm**	**345**

B-11 4PCS WHITE 10W Beam lights		VOLTAGE:90-240V AC,50/60HZ RATED POWER:120W LED:4 PCS 10W high power white LED Extremely Long Life:5000Hr and low power consumption DMX channel:9/28channels Strobe: effect with 1~25flashes per second and pulse effect Tilt:265degree Control mode:DMX512/Master-Slave/Auto run Preset program:9/28 built in programs can be called up via DMX controller Weight:8kg Packing size:117*17*22cm	599
B-11B 4PCS RGBW 10W Beam lights		VOLTAGE:90-240V AC,50/60HZ RATED POWER:120W LED:4 PCS 10W high power RGBW 4 in 1 LED. Extremely Long Life:5000Hr and low power consumption DMX channel:13/39channels Strobe: effect with 1~25flashes per second and pulse effect Tilt:265degree pan:540 degree Control mode:DMX512/Master-Slave/Auto run Preset program:8 built in programs can be called up via DMX controller Weight:8kg Packing size:117*17*22cm	699
B-12 2R Beam lights		Input power:110-240V 50/60 Hz Discharge lamp with a short arc burner in a reflector system Type: MSD R2 132W Output Lamp power: 160W Color temperature: 8,300 K Average life: 6,000 h 3-lens optical group combination Focus: electronic Interchangeable color wheel with 12 colors + open Interchangeable gobo wheel with 14 fixed gobos + open High speed shake effect 8-face rotating prism Frost filter 14 DMX 512 control channels LCD display Pan/Tilt Resolution: 16 bit PAN = 540° TILT = 250°	660
NEW B-13 5R SNIPER lights hot		Voltage: AC100-240V 50/60Hz Power: 350W Lamp: Philips 5R Average lifespan: 2200Hours Color temperature: 8000K 2 DMX control mode: 14/20Channels Gobo plate: 17gobos+open Color plate: 14 colors+open One rotating 3-facet prism Beam Angle 3° Mechanical dimmer Built-in laser effect X/Y and Z high-speed reflecting mirror system Packing Size:45*41*37cm N.W:9.4KG G.W:10.4KG **with beam scanner and laser effect.**	620